


# TFX-ISD

## 79214 Data Sheet

The TFX-ISD is an input card that works with the TekFlex-16 and TekFlex-32 Chassis. The card supports an SDI input, along with an SDI loop output.

### Features:

- SDI Input and SDI Loop output
- Capable of resolutions up to full 1080P
- Transmission distances of up to 100m (325 ft)
- Maximum power consumption of only 6.1W
- Compatible with any input slot of TekFlex-16 or -32 flexible matrix switchers
- Shipped fully functional, pre-programmed, and rigorously tested

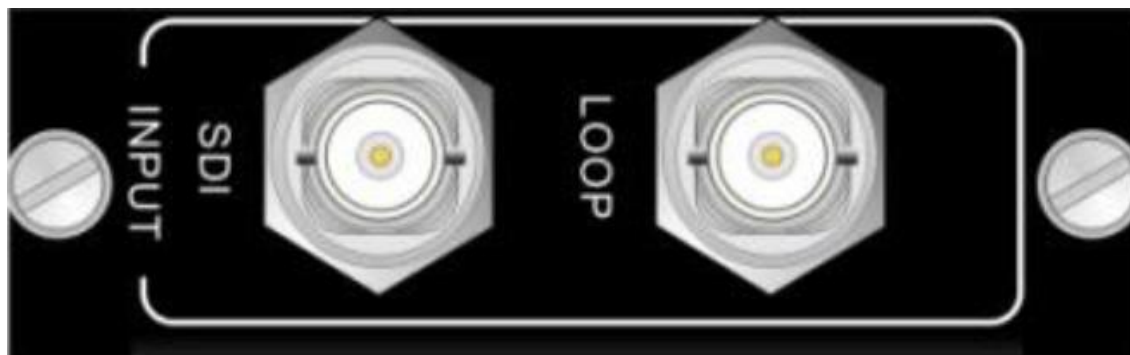

# TFX-ISD

## 79214 Technical Specifications

<b>Input</b>	1 SDI (BNC, Female)
<b>Output</b>	1 SDI Loop (BNC, Female)
<b>Signal Format</b>	3G-SDI/HD-SDI/SDI
<b>Supported Resolutions</b>	Up to 1920x1080p
<b>Transmission Distance</b>	Up to 325 ft. (100m)
<b>Power Consumption</b>	6.1W (max)
<b>Temperature</b>	32 ~ 122°F (0 ~ 50°C)
<b>Humidity</b>	10 ~ 90%

Specifications are subject to change without notice